

**HOME & BUILDING & YACHT
AUTOMATION SECURITY SOLUTIONS**

catalistino TVCC





CATALISTINO TVCC

VIDEOSORVEGLIANZA	2
Telecamere powerline	8
IL SISTEMA DI VIDEOSORVEGLIANZA BOXTY	9
TIPOLOGIE STANDARD DI SISTEMA BOXTY	11
Accessori TVCC	13
Alimentatori	16
Cavi TVCC	18

VIDEOSORVEGLIANZA

AHD & TVI & CVI & Analog 4 in 1 camera			
	OBS-EX783ZP	1.0MP-1/4 cmos 720P,with IR-Cut,with OSD (adjust AHD,CVI,TVI and Analog), H42+8901	180,00
	OBS-EX833ZP	2.0MP-1/3 SONY 1080P, with IR-Cut,with OSD (adjust AHD,CVI,TVI and Analog), 2441H+IMX323	270,00
	IR Waterproof Camera - IP67 - lens 3,6 mm/F2.0 - 6 pcs array leds 20 Mt – dimensioni 165x62x64 - weight 0,5 kg		
 	OBS-EX783WP	1.0MP-1/4 cmos 720P,with IR-Cut,with OSD (adjust AHD,CVI,TVI and Analog), H42+8901	300,00
	OBS-EX833WP	2.0MP-1/3 SONY 1080P, with IR-Cut,with OSD (adjust AHD,CVI,TVI and Analog), 2441H+IMX323	405,00
	IR Waterproof Camera - IP66 - lens 2,8-12 mm varifocal HD lens - 36 pcs array leds 40 Mt - dimensioni 225x90x81 - weight 0,6 kg		
	OBS-EX783YP	1.0MP-1/4 cmos 720P,with IR-Cut,with OSD (adjust AHD,CVI,TVI and Analog), H42+8901	525,00
	OBS-EX833YP	2.0MP-1/3 SONY 1080P, with IR-Cut,with OSD (adjust AHD,CVI,TVI and Analog), 2441H+IMX323	600,00
	IR Waterproof Camera - IP67 - lens 2,8-12 mm varifocal HD lens - 12 pcs array leds 60 Mt - dimensioni 300x110x95 - weight 1,2 kg		

AHD SPEED DOME


	OBS-AHD9020LIR1	20x zoom rate, 2.0 Megapixels, IR distance is 120meters, 1920*1080 AHD Video Output, high speed dome camera	1.250,00
	OBS-AHD9020MIR	10x zoom rate, 2.0 Megapixels, 1920*1080 AHD Video Output, 4.5"high speed dome camera, IP66 rate protection, IR distance 50M	1.350,00


IP CAMERAS

	OBS-X1003W	1/4-inch 1.0 Megapixel OV9712+HI3518E CMOS, 720P: 1280*720 D1: 704*576, POE optional	195,00
	OBS-X2003W	1/2.7-inch 2.0 Megapixel SC2035+3516C CMOS, 1080P: 1920*1080 720P: 1280*720, POE optional	310,00
	OBS-X4003W	1/3-inch 4.0 Megapixel OV4689+3516D H.265 CMOS, 2592x1520@22fps or 5MP-2592x1944@15fps , POE optional	470,00
	3.6mm megapixel lens, 36pcs Φ5 IR Led 10MT, IR-CUT supported, Dual-core 32 bit DSP, Dual stream encoding, Cloud network(P2P) and Watchdog supported, IR Waterproof Camera IP67		
	OBS-X1306ZF	1/3-inch 1.3 Megapixel 0131+3518E CMOS, 960P: 1280*960 720P 1280*720, POE optional	385,00
	OBS-X2006ZF	1/2.7-inch 2.0 Megapixel SC2035+3516C CMOS, 1080P: 1920*1080 720P: 1280*720, POE optional	490,00
	OBS-X4006ZF	1/3-inch 4.0 Megapixel OV4689+3516D H.265 CMOS, 2592x1520@22fps or 5MP-2592x1944@15fps , POE optional	670,00
	2.8-12mm megapixel lens,42pcs Φ5 IR Led, 40M IR distance, IR-CUT supported, Dual-core 32 bit DSP, Dual stream encoding, Cloud network(P2P) and Watchdog supported		
	OBS-X2008ZF	1/2.7-inch 2.0 Megapixel SC2035+3516C CMOS, 1080P: 1920*1080 720P: 1280*720, POE optional	595,00
	OBS-X4008ZF	1/3-inch 4.0 Megapixel OV4689+3516D H.265 CMOS, 2592x1520@22fps or 5MP-2592x1944@15fps , POE optional	720,00
	2.8-12mm megapixel lens,12pcs x IR Array LEDs, 60M IR distance, IR-CUT supported, Dual-core 32 bit DSP, Dual stream encoding, Cloud network(P2P) and Watchdog supported		

	OBS-X1000D	1/4-inch 1.0 Megapixel OV9712+HI3518E CMOS, 720P: 1280*720 D1: 704*576, POE optional	220,00
	OBS-X2000D	1/2.7-inch 2.0 Megapixel SC2035+3516C CMOS, 1080P: 1920*1080 720P: 1280*720, POE optional	340,00
	OBS-X4000D	1/3-inch 4.0 Megapixel OV4689+3516D H.265 CMOS, 2592x1520@22fps or 5MP-2592x1944@15fps , POE optional	595,00
	3.6mm megapixel lens, 24pcs Ø5 black IR Led, IR-CUT supported, Dual-core 32 bit DSP, Dual stream encoding, Cloud network(P2P) and Watchdog supported, metal vandalproof shell		
 	OBS-X2008D	1/2.7-inch 2.0 Megapixel SC2035+3516C CMOS, 1080P: 1920*1080 720P: 1280*720, POE optional	460,00
	OBS-X4008D	1/3-inch 4.0 Megapixel OV4689+3516D H.265 CMOS, 2592x1520@22fps or 5MP-2592x1944@15fps , POE optional	690,00
	2.8-12mm megapixel lens, 30pcsØ5 leds, IR-CUT supported, Dual-core 32 bit DSP, Dual stream encoding, Cloud network(P2P) and Watchdog supported, metal vandalproof shell		
 	OBS-IP7020LIR2	OBS technology 20x zoom rate, 2.0 Megapixels, IR distance is 120M, 1920 * 1080 IP Video Output high speed dome camera	1.485,00
	OBS-IP9020LIR2	OBS technology 20x zoom rate, 2.0 Megapixels, 1920 * 1080 IP Video Output high speed dome camera, with Auto tracking function	2.100,00
	OBS-IP8036LIR4	OBS technology 36x zoom rate, 2.0 Megapixels, IR distance is 150M, 1920 * 1080 IP Video Output high speed dome camera	2.500,00
	OBS-9000IP	3D Jostick, 5" colorful LED display, Auto search & add IP	970,00

TVI/AHD/IP/CVI/Analog 5 in 1 1080P DVR (Playback:25fps)

	OBS-LSX6104HX	<p>TVI Mode: 4 x 720/1080N @ 30fps AHD Mode: 4 x 720/960/1080N @ 30fps Analog Mode: 4 x 960H @ 30fps NVR Mode: 4 x IP Camera(720/960/1080P) @ 30fps Hybrid Mode: TVI(720/1080N) + AHD (720/960/1080N) + IP (720/960/1080P) + Analog(960H) 4ch video in,TV,VGA,HDMI output ; 1ch audio in (4ch audio optional) , 1ch audio output; 1 SATA x 6TB; Max 1~4ch @30fps record & playback; P2P; Cloud Storage; built-in free DDNS; WiFi Supported; Support UTC function; 3G Dongle supported ; UPNP; Digital zoom; mobile phone surveillance; 1 RJ45; 2/3 USB2.0; power(DC12V),remote,mouse, PTZ controlable DVR, <i>App goodeye</i>, Escluso HD</p>	700,00
	OBS-LSX6108HX	<p>TVI Mode: 8 x 720/1080N @ 30fps AHD Mode: 8 x 720/960/1080N @ 30fps Analog Mode: 8 x 960H @ 30fps NVR Mode: 8 x IP Camera(720/960/1080P) @ 30fps Hybrid Mode: TVI(720/1080N) + AHD (720/960/1080N) + IP (720/960/1080P) + Analog(960H) 8ch video in,TV,VGA,HDMI output ; 1ch audio in (1ch audio optional) , 1ch audio output; 1 SATA x 6TB; Max 1~8ch @30fps record & playback; P2P; Cloud Storage; built-in free DDNS; WiFi Supported; Support UTC function; 3G Dongle supported ; UPNP; Digital zoom; mobile phone surveillance; 1 RJ45; 2/3 USB2.0; power(DC12V),remote,mouse, PTZ controlable DVR, <i>App goodeye</i>, Escluso HD</p>	890,00
	OBS-LSX6116HX	<p>TVI Mode: 16 x 720/1080N @ 30fps AHD Mode: 16 x 720/960/1080N @ 30fps Analog Mode: 16 x 960H @ 30fps NVR Mode: 16 x IP Camera(720/960/1080P) @ 30fps Hybrid Mode: TVI(720/1080N) + AHD (720/960/1080N) + IP (720/960/1080P) + Analog(960H) 16ch video in,TV,VGA,HDMI output; 1ch audio in, 1ch audio output; 1 SATA x 6TB; Max 1~16ch @30fps record & playback; P2P; Cloud Storage; built-in free DDNS; WiFi Supported; Support UTC function; 3G Dongle supported ; UPNP ; Digital zoom; mobile phone surveillance; 1 RJ45; 2/3 USB2.0; power(DC12V),remote,mouse, <i>App goodeye</i>, Escluso HD</p>	1.280,00

NVR			
<p>2 SATA*8TB 350*245*60mm</p> 	<p>OBS-8804XKA</p>	<p>IP input: 4ch@720/960/1080P @30fps Bandwidth: 32Mbps; 2 SATA*8TB; Max 1~4ch playback; VGA, TV, HDMI output ; Audio(optional): 4ch in by RJ45; ONVIF , Multi-Protocols; P2P ; Cloud Storage; Built-in free DDNS ; WiFi; UPNP ; 3G Dongle supported; Digital zoom; mobile phone surveillance ; 1 RJ45; 2 USB2.0 ; Alarm: 4ch in/1ch out; DC 12V 4A , remote, mouse</p>	<p>600,00</p>
	<p>OBS-8808XKA</p>	<p>IP input: 8ch@720/960/1080P @30fps Bandwidth: 48Mbps; 2 SATA*8TB; Max 1~8ch playback; VGA, TV, HDMI output; Audio(optional): 8ch in by RJ45; ONVIF , Multi-Protocols; P2P ; Cloud Storage; Built-in free DDNS; WiFi; UPNP; 3G Dongle supported; Digital zoom; mobile phone surveillance ; 1 RJ45; 2 USB2.0 ; Alarm: 4ch in/1ch out; DC 12V 4A , remote, mouse, Escluso HD</p>	<p>765,00</p>
	<p>OBS-8816XKA</p>	<p>IP input: 16ch@720/960/1080P @30fps; <i>(support 3.0/4.0/5.0MP)</i> Bandwidth: 160Mbps; 2SATA*8TB; Max 1~16ch playback; VGA, TV, HDMI output ; Audio: 16ch in by RJ45, 1ch out by RCA, 1ch intercom; ONVIF , Multi-Protocols; P2P ; Cloud Storage; Built-in free DDNS ; UPNP; 3G Dongle supported; Digital zoom; mobile phone surveillance ; 1 RJ45; 2 USB2.0 ; 1 RS485; Alarm: 8ch in/3ch out; DC 12V 4A , remote, mouse, Escluso HD</p>	<p>1.080,00</p>
	<p>OBS-8832XKA</p>	<p>IP input: 32ch@720/960/1080P @30fps; <i>(support 3.0/4.0/5.0MP)</i> Bandwidth: 200Mbps; 2SATA*8TB; Max 1~16ch playback; VGA, TV, HDMI output; Audio: 16ch in by RJ45, 1ch out by RCA, 1ch intercom; ONVIF , Multi-Protocols; P2P ; Cloud Storage; Built-in free DDNS; UPNP ; 3G Dongle supported; Digital zoom; mobile phone surveillance ; 1 RJ45; 2 USB2.0 ; 1 RS485; Alarm: 16ch in/3ch out; DC 12V 4A , remote, mouse, Escluso HD</p>	<p>1.620,00</p>
<p>4 CH NVR SUPPORTA 2 CH 2.0 MP + 2 CH 4.0 MP o 5 MP 8 CH NVR SUPPORTA 4 CH 2.0 MP + 4 CH 4.0 MP o 5 MP 16 CH NVR SUPPORTA 8 CH 2.0 MP + 8 CH 4.0 MP o 5 MP 32 CH NVR SUPPORTA 16 CH 2.0 MP + 16 CH 4.0 MP o 5 MP</p>			


DVR Analog

	OBS-H1004XAK	4ch BNC	450,00
	OBS-H1008XAK	8ch BNC	530,00
	OBS-H1016XAK	16ch BNC	750,00

FUNCTIONS:

1. high-performance CPU, support HDMI,VGA,CVBS output
2. Digital zoom function for both preview and playback
3. Support Cloud network function (P2P:Plug&Play)
4. Support 4ch D1/1ch D1+7ch CIF/2ch D1+ 14ch CIF @30fps record & 16ch@30fps record & playback at the same time
5. Advanced playback function can make playback exact to a second
6. Graphical operating interface, support mouse、panel and remote control operation
7. Support HTTP、SMTP、DDNS、DHCP、PPPOE and NAT traversing
8. Support mobile surveillance(Iphone,Symbian,Blackberry,Android,Windows)
10. Support Built-in free DDNS
- 11.UPNP(Universal Plug & Play)(no need to forward ports in the router)
- 12.Support mobile hard disk backup
13. Escluso HD

TELECAMERE POWERLINE

Codice	Descrizione	Listino Euro
<p>La versione powerline si collega unicamente alla rete elettrica (110-230 Vac), ricevendone l'alimentazione e trasmettendovi ad onde convogliate anche il segnale video digitale. La trasmissione digitale avviene tramite protocollo internazione HomePlug 1.0 a 14Mbps, uno standard internazionale affidabile e collaudato in tutto il mondo.</p>		
EMC-PL-B 	Telecamera PL interno bianca da interno. E' costituita da un involucro Non stagno adatto per tutte le installazioni non esposte ad agenti atm. Obiettivo 3,6 mm. Dim. 1150mmx115mmx40mm	€ 715,00
EMC-PL-N	Telecamera PL interno nera da interno. E' costituita da un involucro Non stagno adatto per tutte le installazioni non esposte ad agenti atm. Obiettivo 3,6 mm. Dim. 115 mm x 115 mm x 40 mm	€ 715,00
EMC-E-PL-B/N	Telecamera PL da esterno bianca/nera. E' costituita da un involucro Non stagno adatto per tutte le installazioni non esposte ad agenti atm. Dim. 135 mm x 135 mm x 49 mm. Temperatura di esercizio -40°+70°	€ 755,00
EZYTV-PL	Ricevitore Powerline uscita TV	€ 613,00
TXS4-TV	Telecomando x EZYTV-PL	€ 58,50
PL-14	Adattatore Powerline-lan	€ 188,00
SD16	Scheda memoria SDHC classe 6 o sup. 16 GB (registrazione da 24 a 68h a seconda della qualità). Temp. di esercizio -25°/+85°	€ 47,00
SD32	Scheda memoria SDHC classe 6 o sup. 32 GB (registrazione da 48 a 136h a seconda della qualità). Temp. di esercizio -25°/+85°	€ 89,00

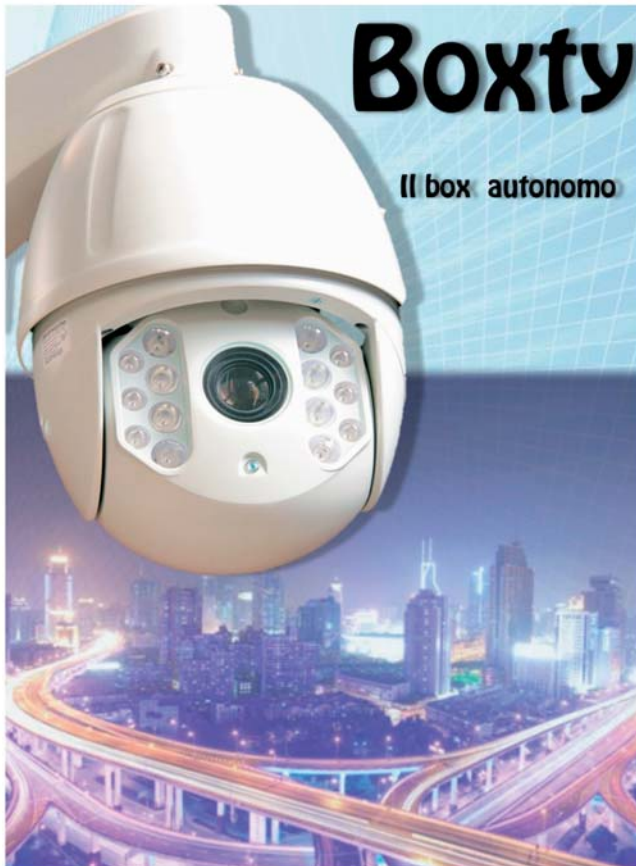
IL SISTEMA DI VIDEOSORVEGLIANZA BOXTY

Si basa sull'ingegnerizzazione di BOX completamente autonomi adibiti alla videosorveglianza che possono essere realizzati su richiesta e specifiche personalizzate del Cliente, Ente pubblico e Azienda.

Esistono delle configurazioni base che utilizzano telecamere fisse, varifocali e Speed Dome.

Possibilità di visione live e registrazioni in remoto. Il Box viene consegnato già pronto, necessita solo dell'alimentazione 220V e della SIM, che a richiesta, è possibile fornire tramite un canone annuo.

Installazione a palo o parete. IP65 e quindi adatto per installazioni all'aperto.



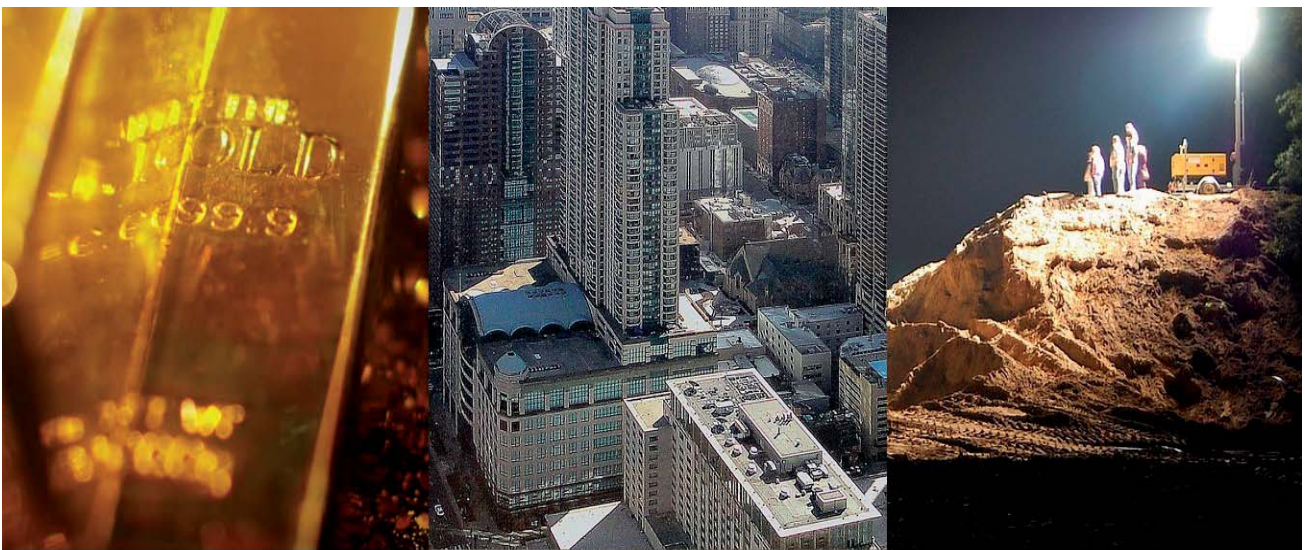
Esempi di applicazione specifica:

- video controllo in zone disagiate
- video controllo in interi paesi a costi contenuti perché non necessita dell'infrastruttura di trasporto dei dati
- video controllo per indagini temporanee
- il Box si monta comodamente rendendosi adatto ad essere utilizzato là dove necessario, anche per brevi periodi
- gestione sicurezza e videocontrollo integrati
- ideale per gestione di aree urbane Comuni Controllo varchi
- ideale per gestione Cantieri – Ponteggi – Abitazioni - Noleggi

BOXTY

Sistema di Videosorveglianza autonomo

a progetto



TIPOLOGIE STANDARD DI SISTEMA BOXTY:

BOXTY D: BOX COMPOSTO DA SPEED DOME 2MPX VARIFOCALI OBIETTIVO VARIFOCAL FINO A 27X, ROTAZIONE 360°, LED INFRAROSSI PER VISIONE NOTTURNA -SISTEMA DI CONVERSIONE 4G - NVR ACQUISIZIONE VIDEO CON 2TB - POSSIBILITA' DI GESTIONE TRAMITE P2P E APP DEDICATA LIVE E PLAYBACK - 220V.

€ 3.420,00



BOXTY 4F: BOX COMPOSTO DA 4TELECAMERE 2MPX VARIFOCALI 2,8-12mm, LED INFRAROSSI PER VISIONE NOTTURNA - SISTEMA DI CONVERSIONE 4G - NVR ACQUISIZIONE VIDEO CON 2TB - POSSIBILITA' DI GESTIONE TRAMITE P2P E APP DEDICATA LIVE E PLAYBACK - 220V.

€ 3.790,00



BOXTY3F: BOX COMPOSTO DA 3 TELECAMERE 2MPX VARIFOCALI 2,8-12mm, LED INFRAROSSI PER VISIONE NOTTURNA - SISTEMA DI CONVERSIONE 4G - NVR ACQUISIZIONE VIDEO CON 2TB - POSSIBILITA' DI GESTIONE TRAMITE P2P E APP DEDICATA LIVE E PLAYBACK - 220V

€ 3.200,00



BOXTY ECO: BOX COMPOSTO DA 4 TELECAMERE AHD DA 1 MXP FOCALE FISSA 3,6mm, LED INFRAROSSI PER VISIONE NOTTURNA - SISTEMA DI CONVERSIONE 4G - NVR ACQUISIZIONE VIDEO CON 500GB - POSSIBILITA' DI GESTIONE TRAMITE P2P E APP DEDICATA LIVE E PLAYBACK - 220V. STAFFA INOX PER FISSAGGIO A PALO CON GANASCE INCLUSA.

IL PRODOTTO È ADATTO PER ESSERE UTILIZZATO IN CANTIERI APERTI - PONTEGGI TEMPORANEI, ABITAZIONI ECC.. . LA TECNOLOGIA AHD CI PERMETTE DI GARANTIRE IL RENDIMENTO ANCHE CON UN USO INTENSIVO DI SPOSTAMENTI DA UN LUOGO ALL'ALTRO IN BREVI PERIODI

€ 2.380,00



BOXTY ECO ALARM: BOX COMPOSTO DA 4 TELECAMERE AHD DA 1MXP FOCALE FISSA 3,6mm, LED INFRAROSSI PER VISIONE NOTTURNA.

SISTEMA DI SICUREZZA CON GSM 4 RIVELATORI A DOPPIA TECNOLOGIA INFRAROSSI, APP DI GESTIONE, SIRENA E POSSIBILITA' DI AMPLIAMENTO RADIO

SISTEMA DI CONVERSIONE 4G - NVR ACQUISIZIONE VIDEO CON 500GB - POSSIBILITA' DI GESTIONE TRAMITE P2P E APP DEDICATA LIVE E PLAYBACK - 220V. STAFFA INOX PER FISSAGGIO A PALO CON GANASCE INCLUSA

€ 3.740,00



ACCESSORI TVCC

Codice	Descrizione	Listino Euro
 BNC	Connettori BNC a crimpare	€ 1,65
 BNC174	Connettori RG174 a crimpare	€ 2,40
 BNCMICRO	Connettori MicroBNC a crimpare per cavo microcoassiale	€ 2,90
 BNC-RG59	Connettori BNC RG59	€ 2,40
 BNC-MTM	Connettori BNC FF	€ 2,40
 BNCF-RCA	Connettori BNC F TO RCA	€ 2,40
 BNC-T	Convertitore BNC TO F	€ 2,40
 BNC-THREAD	Convertitore VITE-FILO	€ 2,40
 BCRIMPMICRO	Pinza per crimpaggio BNC a 5 impronte adatta per microBNC	€ 256,00
 PWC01	Connettori alimentazione telecamere con morsetti maschio	€ 3,20



PWC02 Connettori alimentazione telecamere con morsetti femmina € **3,20**



PWC03 Connettori BNC video € **3,20**



PS604-POE SWITCH 4 ports, standard IEEE 802.3af protocol, 100 to240V AC/ 50 to 60Hz, DC48V/ 0.5A € **270,00**



PS608-POE SWITCH 8 ports, standard IEEE 802.3af protocol, 100 to240V AC/ 50 to 60Hz, DC48V/ 0.5A € **530,00**



PS616-POE SWITCH 16 ports POE € **1.320,00**



N1-POE External POE set, PSD&PSE module € **180,00**



POE-S-100 POE Splitter – (video+power 100 mt) € **80,00**



POE-S-50 POE Splitter – (video+power 50 mt) € **55,00**



POE-S-30 POE Splitter – (video+power 30 mt) € **40,00**



S1-POE POE Sparator DC12V 1,25A € **220,00**



OBS-201A/C Trasmittitore / Ricevitore su cavo UTP Passivo (coppia)
Portata : 400 mt colore € **24,00**



OBS-120T/R Trasmissione video su cavo UTP – 1 canale
Trasmittitore/ricevitore attivo per segnale videocomposito
portata 1000 m colore € **80,00**

OBS-1610R Ricevitore attivo per segnale video composito 16 CANALI su cavo UTP € **930,00**



OBS-MONVGA Monitor VGA LED per videosorveglianza 19"-22" € **264,00**
OBS-MONPAL Monitor PAL TV LED per videosorveglianza 19"-22" € **430,00**



OBS-HD

1TB ST1000DM003	netto	€ 110,00
2TB ST2000DM001	netto	€ 140,00
3TB ST3000DM001	netto	€ 180,00
4TB ST4000VX000	netto	€ 250,00
6TB ST6000DM001	netto	€ 350,00

OBS-SWITCH5 Switch 5 porte 10/100/1000 € **105,00**

OBS-SWITCH8 Switch 8 porte 10/100/1000 € **130,00**

OBS-SWITCH16 Switch 16 porte 10/100/1000 € **380,00**

OBSROUTER3-4G Router Industriale 3G-4G con seriale e I/O € **555,00**

OBSACCESSPOINT Access point da interno/esterno lunga portata cifrata wireless € **280,00**

OBSMODULVIDEO Modulatore video all-in-one che Permette la distribuzione del
segnale audio/video da ricevitori satellitari, telecamere a circuito
chiuso, lettori Blu-ray, negli impianti Tv € **858,00**

Wall Mount DC power supplies (Indoors Application)



Supply Voltage: AC100V~240V / 50-60HZ

Output Voltage: DC12V

Current per port: 18ch

Total Output Current: 20A








OBSPS12V20A

Wall Mount DC power supplies, 12V20A 18ch output

€

265,00

CAVI TVCC

Codice	Descrizione	Listino Euro
Su richiesta vengono forniti cavi allarme di qualsiasi tipo.		
EL-080591		
	Cavo RG59 Gr 2 bobina da 100 Mt prezzo al mt - Nero	€ 0,60/mt
EL-084591		
	Cavo RG59 Gr 4 bobina da 100 Mt prezzo al mt - Azzurro	€ 0,79/mt
EL-082051		
	Cavo composito microcoassiale +2 x0.5 +2x0.22 Matassa da 100mt - Bianco	€ 1,09/mt
EL-098243-BOX		
	Cavo UTP cat 5e box da 305 Mt - 4x2x24 AWG - Grigio	€ 158,00/Box
EL-099243-BOX		
	UTP CAT5e 4x2x24AWG - Box da 305mt - Nero "JELLY" DA ESTERNO SPECIALE	€ 294,00/Box
EL-098233-BOX		
	UTP CAT6 4x2x23AWG - Box da 305mt - GR LSZH da interno/esterno	€ 250,00/Box
EL-082203A-BOX		
	TVCC AL+DATI 2x1,5+2x2x24AWG - Box da 305mt - GR 4 AZZURRO	€ 517,00/Box



H O M E & B U I L D I N G
Y A C H T A U T O M A T I O N
S E C U R I T Y S O L U T I O N S



OBS SRL

Headquarter: Via Piemonte 11/D - 46049 VOLTA MANTOVANA – MN -ITALY

Show Room&Lab: Corso Garibaldi, 31 – 46033 CASTELDARIO – MN- ITALY

Show Room: Via San Francesco di Sales,16A – 00165 ROMA – RM- ITALY

Phone 0376 895140 - Fax : 0376 812838

Web: www.obsrsl.com
e-mail : info@obsservizi.it

<https://www.facebook.com/Obssrslhome>

A vertical red bar is centered on a dark grey background. On either side of the bar, there are light grey curved lines that appear to be part of a larger circular or arc-like shape. The lines are thin and have a slight gradient.

www.obsservizi.it